

ESD-TR-65-137
ESTI FILE COPY

ESD-TR-65-137

TM-4213

ESD RECORD COPY

RETURN TO
SCIENTIFIC & TECHNICAL INFORMATION DIVISION
(ESTI), BUILDING 1211

ESD ACCESSION LIST

ESTI Call No. AL 50947

Copy No. 1 of 1 cys.

STUDIES OF DISPLAY SYMBOL LEGIBILITY

PART VII: Comparison of Displays at 945- and 525-Line Resolutions

MAY 1966

D. Shurtleff

D. Owen

Prepared for

DEPUTY FOR ENGINEERING AND TECHNOLOGY
DECISION SCIENCES LABORATORY
ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachusetts



Distribution of this document is unlimited.

Project 7030

Prepared by
THE MITRE CORPORATION
Bedford, Massachusetts
Contract AF19(628)-5165

CSHRO

ADD 633649

This document may be reproduced to satisfy official needs of U.S. Government agencies. No other reproduction authorized except with permission of Hq. Electronic Systems Division, ATTN: ESTI.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. Retain or destroy.

STUDIES OF DISPLAY SYMBOL LEGIBILITY

PART VII: Comparison of Displays at 945- and 525-Line Resolutions

MAY 1966

D. Shurtleff
D. Owen

Prepared for

DEPUTY FOR ENGINEERING AND TECHNOLOGY
DECISION SCIENCES LABORATORY
ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachusetts



Distribution of this document is unlimited.

Project 7030


Prepared by
THE MITRE CORPORATION
Bedford, Massachusetts
Contract AF19(628)-5165

FOREWORD


This report is one of a series describing symbol legibility for television display. Additional information on this topic may be found in the following reports: "Studies of Display Symbol Legibility: The Effects of Line Construction, Exposure Time, and Stroke Width," by B. Botha and D. Shurtleff, The MITRE Corp., Bedford, Mass., ESD-TR-63-249, February 1963; "Studies of Display Symbol Legibility, II: The Effects of the Ratio of Width of Inactive to Active Elements Within a TV Scan Line and the Scan Pattern Used in Symbol Construction," by B. Botha and D. Shurtleff, The MITRE Corp., Bedford, Mass., ESD-TR-63-440, July, 1963; "Studies of Display Symbol Legibility, III: Line Scan Orientation Effects," by B. Botha, D. Shurtleff, and M. Young, The MITRE Corp., Bedford, Mass., ESD-TR-65-138, May 1966; "Studies of Display Symbol Legibility, IV: The Effects of Brightness, Letter Spacing, Symbol Background Relation, and Surround Brightness on the Legibility of Capital Letters," by D. Shurtleff, B. Botha, and M. Young, The MITRE Corp., Bedford, Mass., ESD-TR-65-134, May 1966; "Studies of Display Symbol Legibility, V: The Effects of Television Transmission on the Legibility of Common Five-Letter Words," by G. Kosmider, The MITRE Corp., Bedford, Mass., ESD-TR-65-135, May 1966; and "Studies of Display Symbol Legibility, VI: Leroy and Courtney Symbols," by D. Shurtleff and D. Owen, The MITRE Corp., Bedford, Mass., ESD-TR-65-136, May 1966.

REVIEW AND APPROVAL

This Technical Report has been reviewed and is approved.

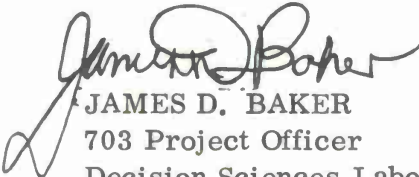


JAMES D. BAKER
703 Project Officer
Decision Sciences Laboratory



ROY MORGAN
Colonel, USAF
Director, Decision Sciences Laboratory

ABSTRACT

The legibility of Leroy alphanumerics was determined for 6, 8, 10, and 12 active scan lines per symbol height on a good quality 945-line television system. These results were compared with those of a similar study in which an inexpensive commercial 525-line television system was used. One group of subjects identified symbols displayed by the 945-line system while a second group identified symbols displayed by the 525-line system. The symbols were presented singly, and the speed and accuracy with which the subjects were able to identify them were recorded. The results showed that, even with good quality television, identification performance deteriorated for resolutions lower than 10 lines per symbol height. Performance for the two television systems was similar for 8, 10, and 12 lines per symbol height; but at 6 lines per symbol height, performance was better for the 945-line television than it was for the 525-line television system. As with previous experiments in this series, 10 lines per symbol height was the lowest resolution recommended for television displays.

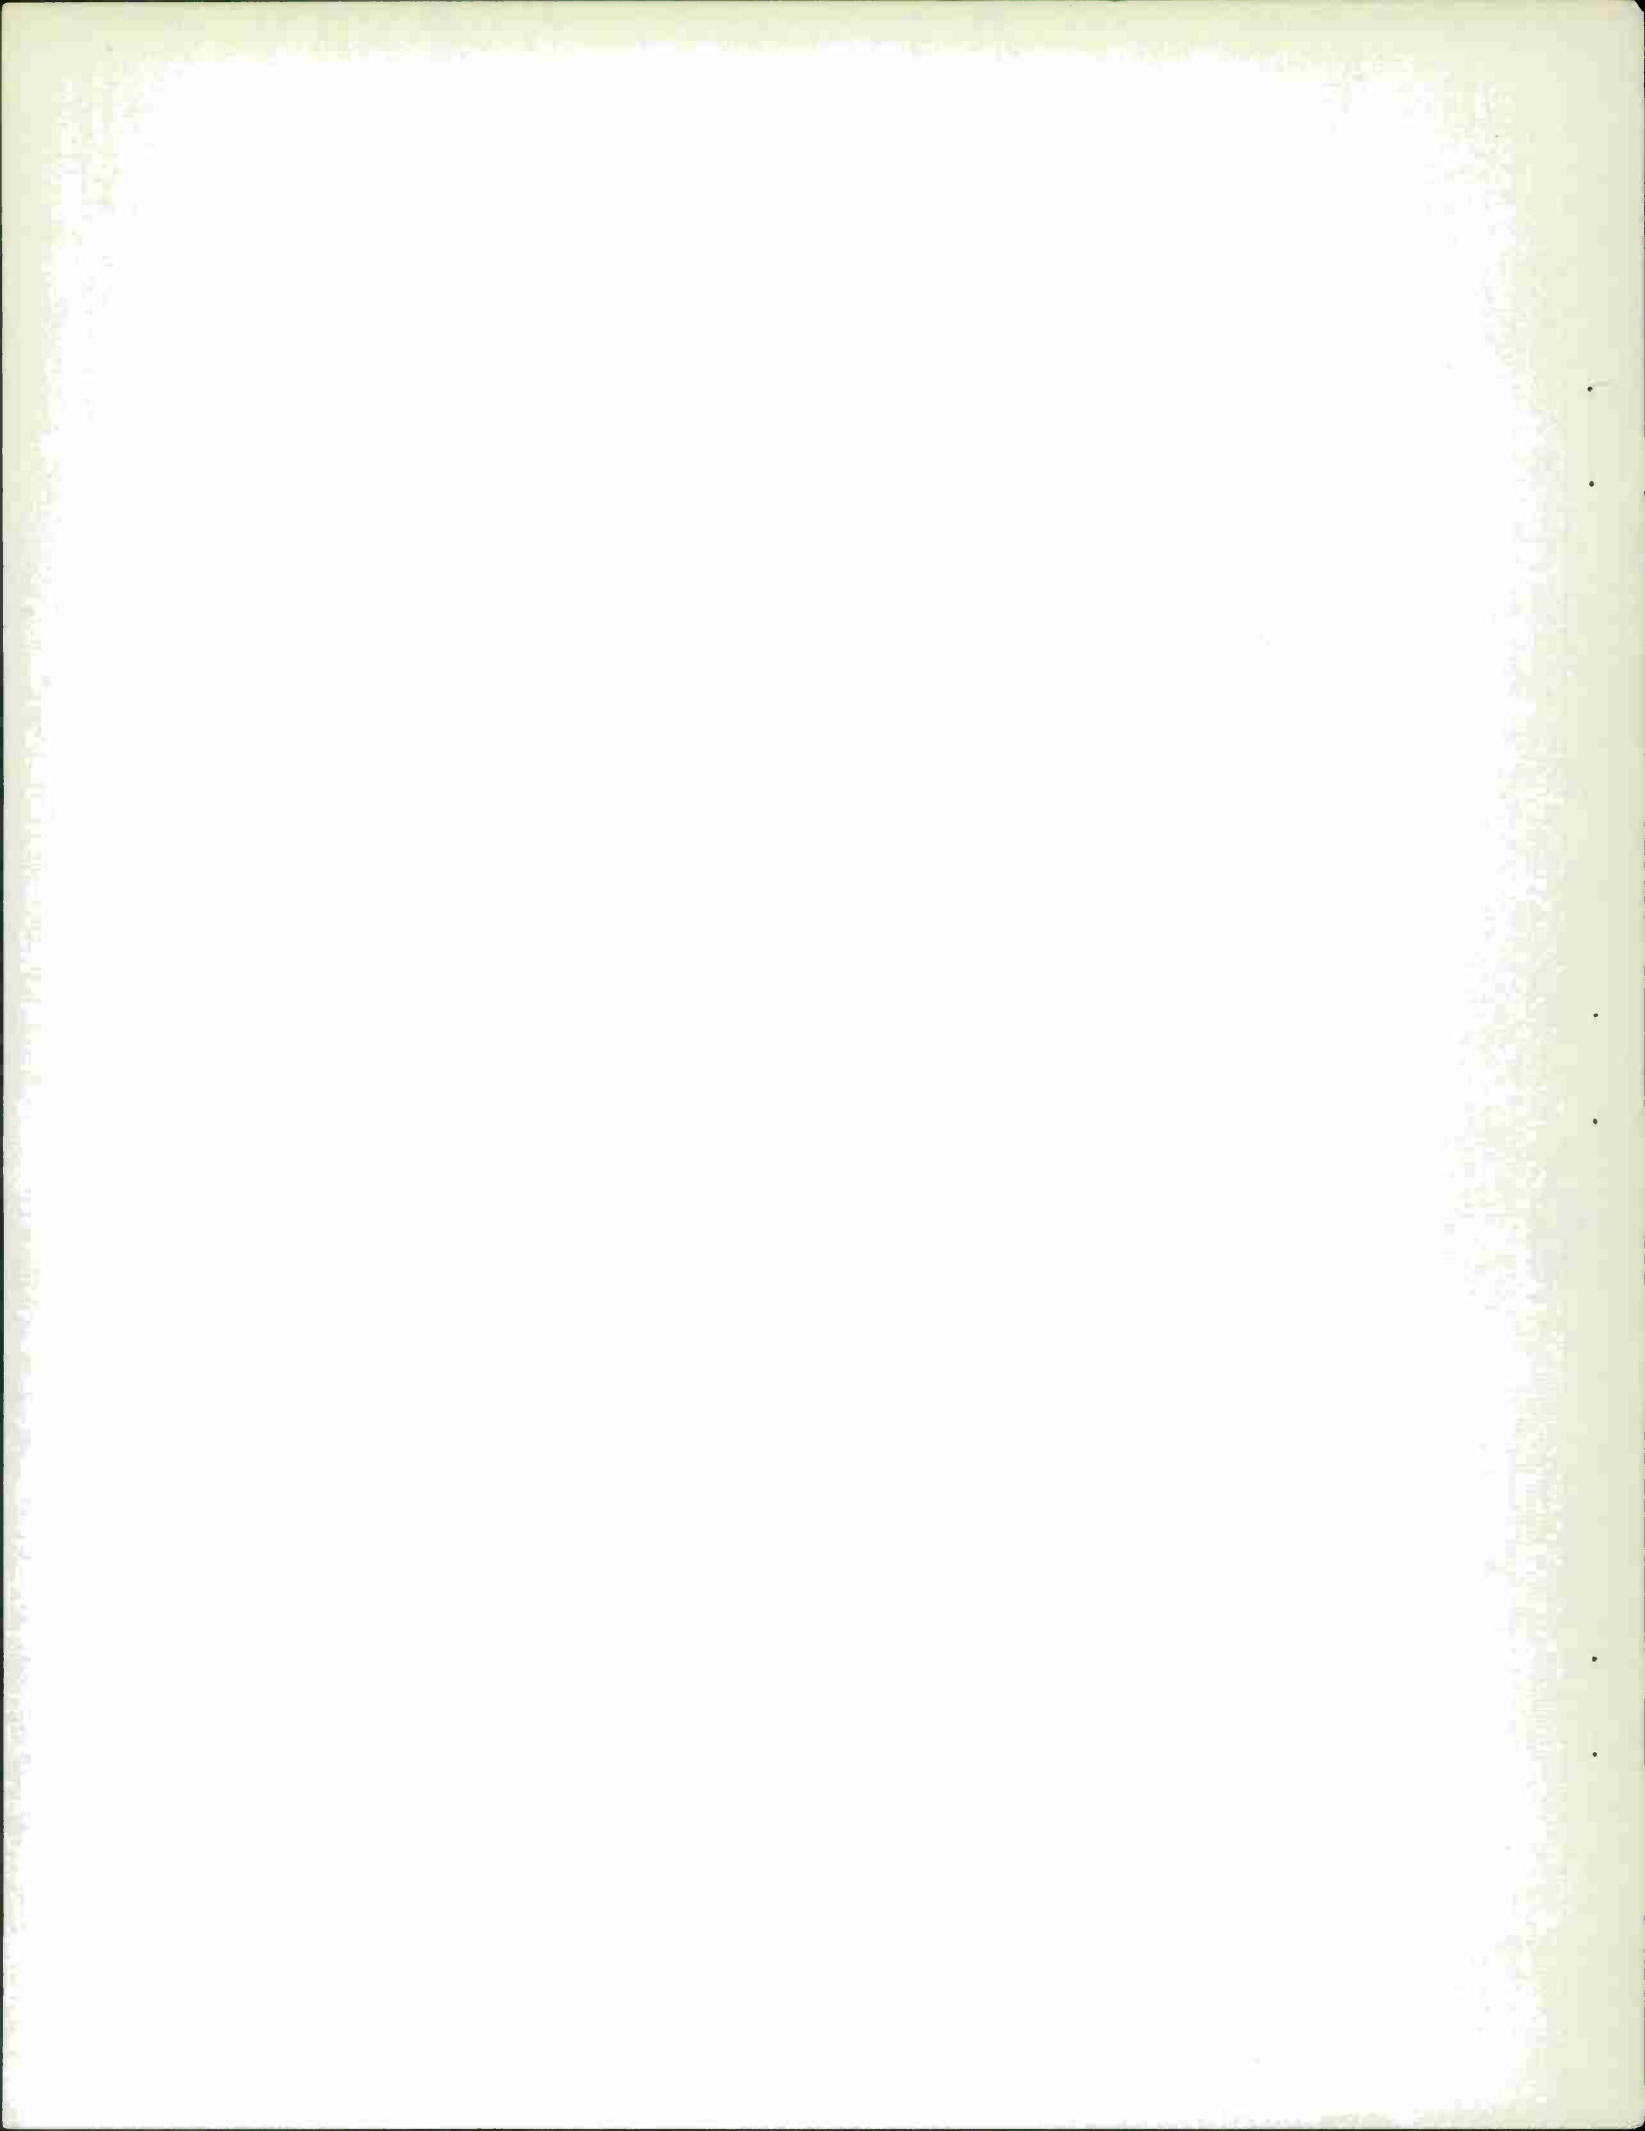

CONTENTS

	<u>Page</u>
SECTION I INTRODUCTION	1
LEGIBILITY, LINES, AND RESOLUTION	1
SIMULATED AND LINE DISPLAYS	1
SECTION II PROCEDURES AND APPARATUS	3
PREVIOUS 525-LINE STUDY	3
SELECTION OF SUBJECTS AND THEIR DUTIES	3
CONTROL OF SYMBOL BRIGHTNESS	3
PROCEDURE FOR TESTS	4
SECTION III RESULTS	5
MEAN IDENTIFICATION TIMES	5
Analysis of Variance	5
MEAN ERROR PERCENTAGE	5
Analysis of Variance	6
SECTION IV DISCUSSION OF RESULTS	
SMALLEST REQUIRED SYMBOL RESOLUTION	10
ADVANTAGES OF 945-LINE SYSTEM	10
DISPLAY AREA ON MONITOR	10
EFFECTS OF BRIGHTNESS CONTROL	11
CONCLUSION	11
APPENDIX I TV CAMERAS	13
APPENDIX II VIDEO MONITORS	14
REFERENCES	15

SECTION I

INTRODUCTION

LEGIBILITY, LINES, AND RESOLUTION

Previous studies [1, 2, 3, 4] have shown that, to produce satisfactory identification of symbols, the number of active scan lines required will be at least 10 lines per symbol height, viewed on an inexpensive commercial 525-line system (both speed and accuracy of identification decline for 8 and 6 lines per symbol height). Symbol identification was worse at 5 lines per symbol height than at 11 lines per symbol height, when simulated television scan lines were used. A question was raised about the applicability of these results to other television systems, and in particular, it was argued that the figure 10 lines per symbol height is probably a conservative estimate for live television displays. With better quality equipment, for example, a good 945-line television system, acceptable reading performance could be obtained with fewer lines per symbol height.

SIMULATED AND LIVE DISPLAYS

Although the results for the simulated television showed some deterioration of performance at 5 lines per symbol height (with a scan line quality better than could be expected from any live television system) it was possible that with better quality live television the recommended number of scan lines per symbol height could be reduced to some value less than 10 lines (found for the inexpensive 525-line television) but greater than 5 lines per symbol height (found for the simulated television).

A General Precision 945-line television was available for research use. Using this system, it was possible to determine the smallest number of lines

per symbol height required for good quality television and to compare symbol identification for expensive and inexpensive television systems. Speed and accuracy of identification of standard Leroy symbols were compared for the two television systems at 6, 8, 10 and 12 active scan lines per symbol height.

SECTION II

PROCEDURES AND APPARATUS

PREVIOUS 525-LINE STUDY

This study duplicates the procedures employed in an earlier study, which used a 525-line system,^[3] * therefore, the description of procedure and apparatus given here is limited to the particulars that apply to the 945-line system (see Appendix I and II.)

SELECTION OF SUBJECTS AND THEIR DUTIES

The four subjects employed, whose ages ranged from 23 to 43 years, were screened for normal vision with a Bausch and Lomb Ortho-Rater. The subjects started symbol exposure by actuating a hand-operated switch and verbally identified the symbol by speaking into a microphone, which terminated the symbol's exposure. The time required to identify the symbol, and the symbol named, was recorded.

CONTROL OF SYMBOL BRIGHTNESS

The symbols used were Leroy alphanumerics. They were projected one at a time onto a translucent screen, which was mounted on a modified Motion Analyzer. Brightness was adjusted to 20 and 2 foot-lamberts, for the symbol and the background. Symbol brightness was not as variable for this

* Of particular relevance are the methods of procedure for the group viewing Leroy alphanumerics during the first part of the experiment, since the same procedure was used in the present study. The data obtained from that group are included in the present paper for comparisons of performance with the 945-line television. A description of the projection and recording equipment is given by Kosmider^[5].

system (945-line) as it had been for the 525-line system. In the latter, brightness varied as much as 25 percent between measurements taken before and after an experimental session. The brightness, measured before and after a session in this study, varied by approximately five percent. In an attempt to maintain symbol appearance uniformity throughout the sessions, adjustments to the TV equipment were always made by the same individual, using one arbitrarily selected symbol as a standard.

PROCEDURE FOR TESTS

Each subject identified symbols for four values of resolution, viz., 6, 8, 10 and 12 active lines per symbol height. The camera-to-screen distance was varied to obtain the different values of symbol resolution, and the subject-to-monitor distance was varied to maintain the visual angle of subtense of symbol height at 11 minutes of arc for each value of resolution. The values of symbol resolution were assigned to subjects in the same way as in the study with 525-lines: each value of resolution preceded and followed each of the other values of resolution, and each value appeared in the first, second, third, and fourth position in the sequence. Each subject made five identifications of each of the 36 symbols (26 letters and 10 numerals) for each of four values of symbol resolution.

SECTION III

RESULTS

MEAN IDENTIFICATION TIMES

The mean identification times and the standard deviation of identification times with the 945- and 525-line television systems are shown in Table I. Mean average identification time was much the same for the two television systems for symbol resolutions of 8, 10, and 12 lines per symbol height. At 6 lines per symbol height, identification time was faster with the 945-line than with the 525-line system. These data are plotted in Figure 1, which shows the similarity between the two systems at 8, 10, and 12 lines, and their divergence at 6 lines.

Analysis of Variance

The mean identification times were converted to reciprocals and submitted to an analysis of variance appropriate for a mixed design. The results showed that symbol resolution was the only significant source of variance. There were no significant differences between television systems, and the interaction between systems and symbol resolution was not statistically significant.

MEAN ERROR PERCENTAGE

The mean error percentage and standard deviation of error percentage for all symbol resolutions are shown in Table II. Identification errors were less with the 945-line system than with the 525-line system at 6, 8, and 12 line values, but not at 10. At 6 lines per symbol height, half as many errors were made with the 945-line system as with the 525-line system. The

Table I
Identification Times and Deviations


Television System		Symbol Resolution (lines/symbol height)			
		6	8	10	12
945-line	M	0.79	0.66	0.50	0.47
	σ	0.12	0.09	0.09	0.05
525-line	M	1.08	0.70	0.54	0.49
	σ	0.29	0.16	0.04	0.04

differences between error percentages with the two television systems are evident in Figure 2.

Analysis of Variance


The error percentages were submitted to an analysis of variance appropriate for a mixed design.* The results are shown in Table III. First, it is noted that a significantly lower percentage of error occurred with the 945-line equipment than with the 525-line equipment; second, that symbol resolution significantly affected error percentages; and third, that the interaction between systems and symbol resolution was significant. The reason for this significant interaction is apparent from the plot of error percentages against resolution value shown in Figure 2. This figure shows that, for 6 lines per symbol height, fewer errors were made with the 945-line system than with the 525-line system, but both systems had similar error rates at 12, 10, and 8 lines.

* The results of this analysis should be viewed with some caution because of the truncated distribution of error scores for the higher values of resolution.

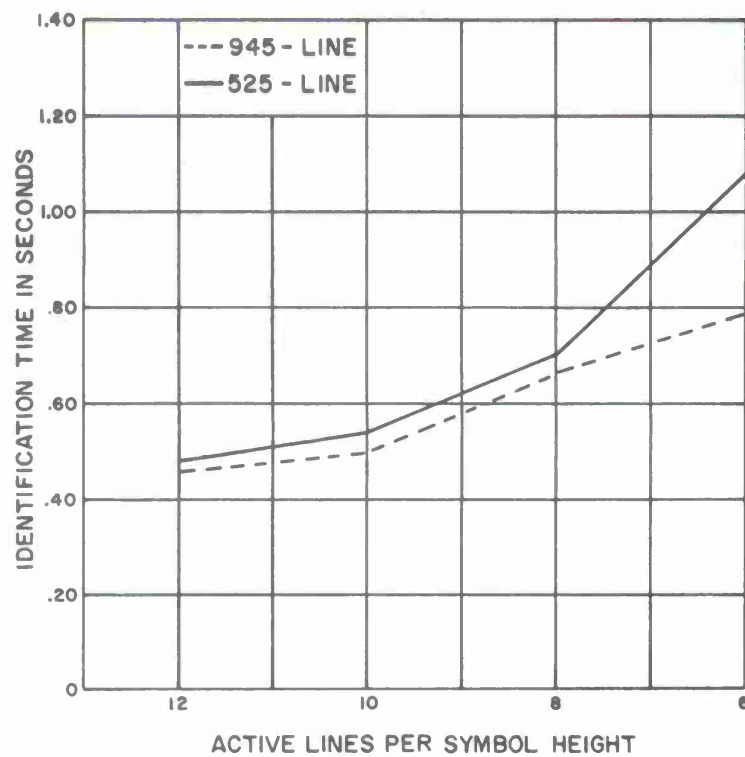

1A-10492

Figure 1. Average Symbol Identification Times.

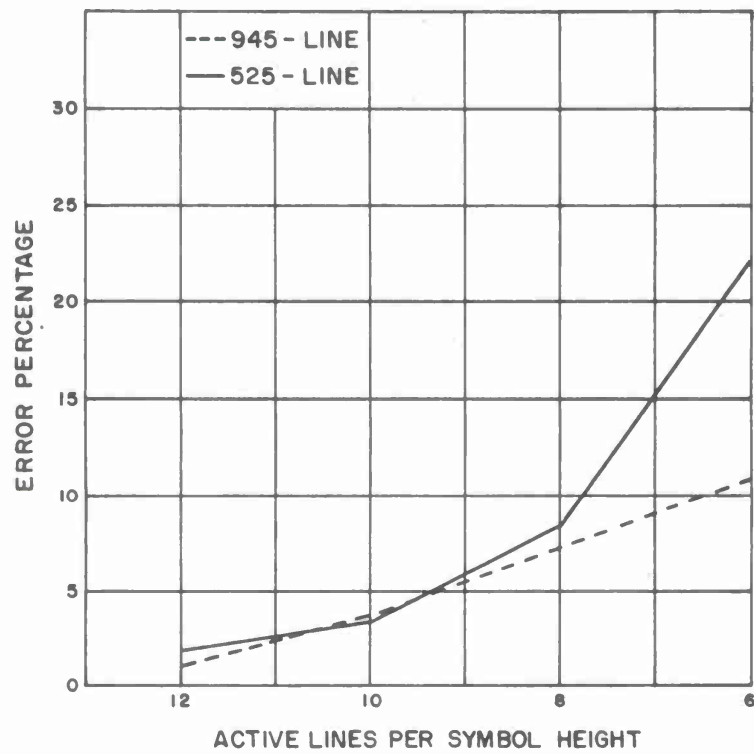

IA-18,493

Figure 2. Average Error Percentage.

Table II
Error Percentage and Deviations

Television System		Symbol Resolution (lines/symbol height)			
		6	8	10	12
945-line	M	11.0	7.2	3.6	1.0
	σ	3.4	4.6	2.2	0.4
525-line	M	22.5	8.6	3.5	2.8
	σ	0.6	3.1	2.0	0.8

Table III
Variance of Error Percentages Analysis

Source of Variation	Sum of Squares	df	Mean Squares	F	P
Between Systems	104.80	1	104.80	29.0	0.01
Between Subjects	21.68	6	3.61		
Total Between	126.48	7	18.07		
Symbol Resolution	1066.25	3	355.42	55.90	0.001
Symbol Resolution x System	168.26	3	56.09	8.82	0.001
Symbol Resolution x Subjects	114.45	18	6.35		
Total Within	1348.96	24			
Total Sum of Squares	1475.44	31			

SECTION IV

DISCUSSION OF RESULTS

SMALLEST REQUIRED SYMBOL RESOLUTION

These data indicate that the smallest value of symbol resolution required, for both the 525-line and 945-line television systems, is 10 active lines per symbol height.

ADVANTAGES OF 945-LINE SYSTEM

Symbol identification for resolutions of 8 and 6 lines per symbol height was better with the 945-line than with the 525-line system; but, with both systems, performance was not as good as that for 10 lines per symbol height. Although reading performance at 6 lines per symbol height was better for the 945-line television system than for the 525-line system, the particular factors involved are not known. The groups of subjects viewing the two systems had similar speed and accuracy scores for solid-stroke Leroy alphanumerics; therefore, the differences noted in performance with the television systems were not due to initial differences between the abilities of the two groups to identify symbols.

DISPLAY AREA ON MONITOR

These data do not mean that the smallest value of symbol resolution required for both television systems will necessarily be the same for symbols displayed on all parts of the monitor's screen. The present data were collected for symbols displayed only at the center of the screen, and it is to be expected that a resolution greater than 10 lines will be needed when symbols are displayed on peripheral areas of the screen.^[6] It is possible that the amount by which symbol resolution needs to be increased at the periphery


will be less for 945-line than for 525-line television systems, because of the improved design of the deflection system in the 945-line equipment.^[7]

EFFECTS OF BRIGHTNESS CONTROL

It was noted earlier in the procedure section that the brightness measures with the 945-line system were more stable than they were with the 525-line system. It is possible that in some instances the symbols on the 525-line set were dimmer than the symbols on the 945-line set, and this difference may account, in part, for the poorer performance with the 525-line system. At the same time, symbol brightness is only one factor among many which may have affected performance (see Tables I and II). The importance of these differences in determining reading performance in this study is not known.

CONCLUSION

The difficulties involved in generalizing about the results of studies like the present one have been discussed in a previous report.^[3] The one conclusion, drawn from the data of other studies in this series,^[1, 2, 3, 4, 5] that is supported by the data of this study, is that symbol resolutions of less than 10 lines per symbol height are associated with a deterioration of reading performance.

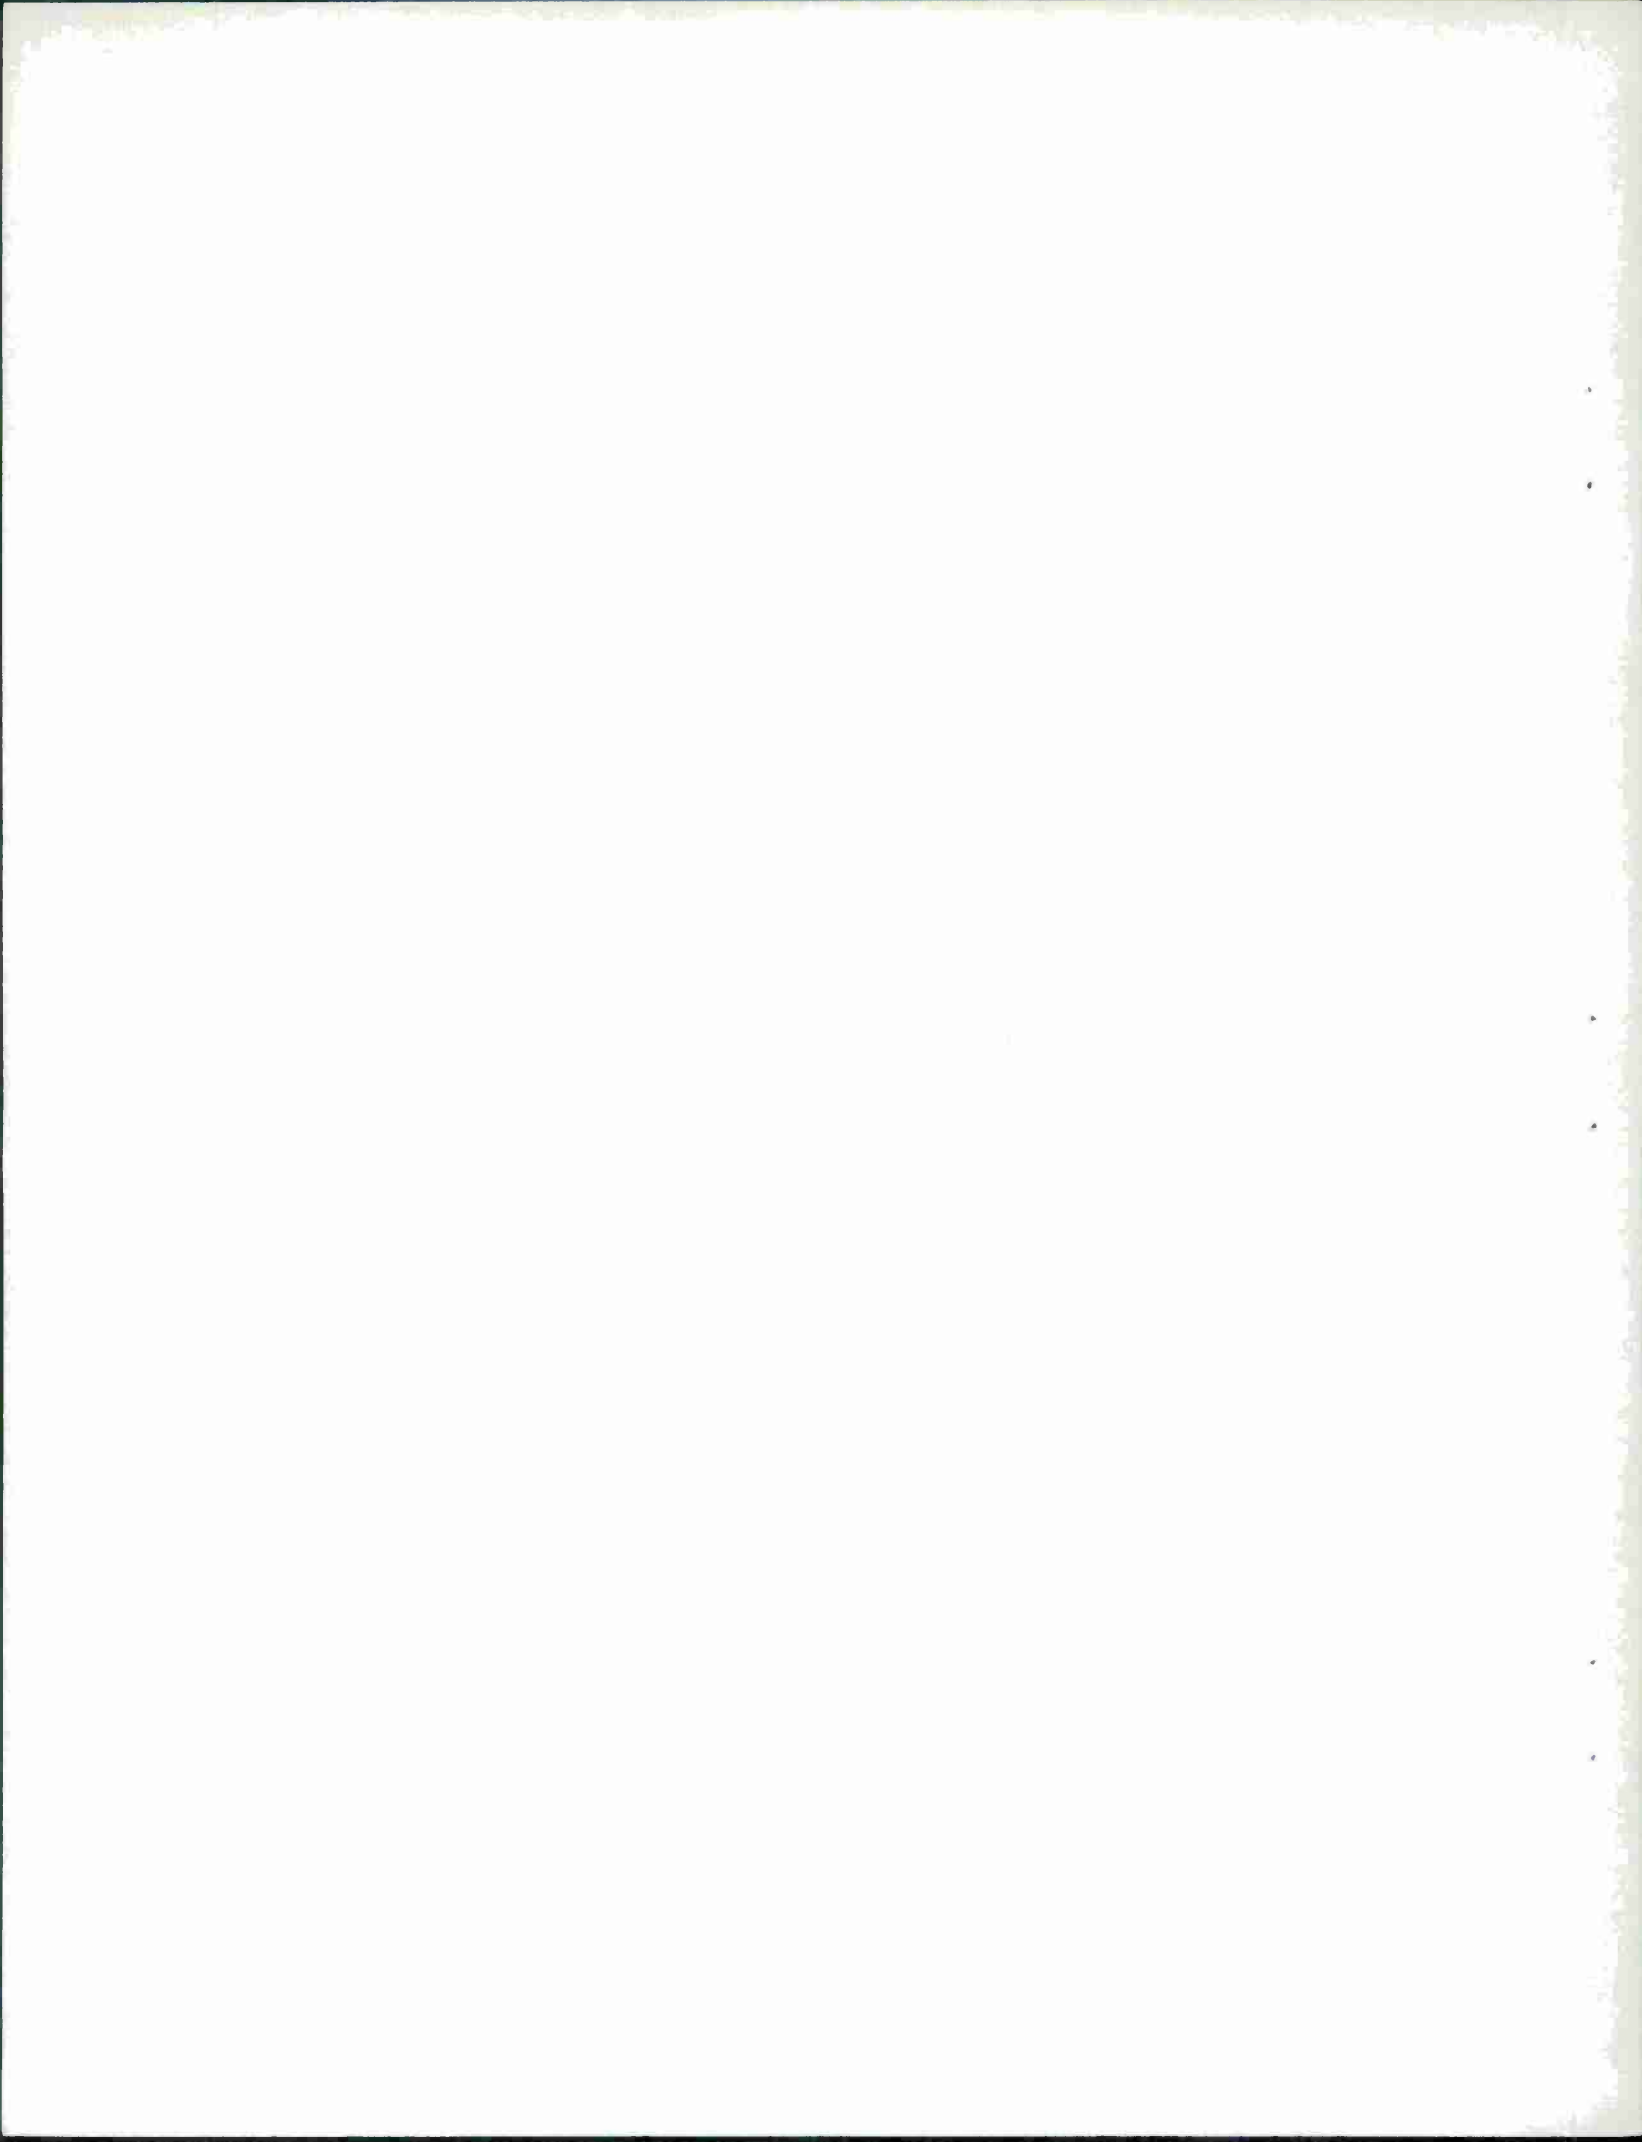

APPENDIX I

TV CAMERAS

CHARACTERISTICS OF TV CAMERAS COMPARED

Some selected characteristics of the TC-100 television camera (525-line) and the General Precision Camera P/N 5358-6 (945-line) are taken from the manufacturers' handbooks. [8, 9] A complete listing of specifications for the two cameras and control circuits may be found in the handbooks.

<u>Specifications</u>	<u>525-Line</u>	<u>945-Line</u>
Input Power	50/60 cycles, 95-125 vac., 0.5 amp., 45 watts.	115 vac., 50-60 cps., control voltage.
Scanning	Horizontal frequency, 15,750 cps.; crystal controlled; vertical frequency, 60 cps.	Horizontal frequency, 28,350 cps.; vertical frequency, 60 cps.
Frame Rate	30 cps.; 2:1 interlace	30 cps.; 2:1 interlace
Resolution (3x4 aspect ratio)	Horizontal, 400 lines; vertical, 300 lines, apparent.	1000 lines (center) @ 675, 875 and 945-lines/frame, vertical 600 lines.
Bandwidth	Nominal, 5 Mc.	17 Mc. \pm 1.0 db.
Output	Composite video, 1.5 v. into 75 ohm line; RF:100 mv.; channels 2-6 into 75 ohm line.	Video, 1.0 v.; non-composite, 1.4 v.; composite impedance, 75 ohms, 2 outputs.
Operating Control	Beam, target, electrical and optical focusing, aperture control.	Beam target, pedestal, gain electrical and optical, focusing, aperture control.

APPENDIX II

VIDEO MONITORS

CHARACTERISTICS OF MONITORS COMPARED

Some selected characteristics of the Miratel 14 inch video monitor (525-line) and the Conrac 21 inch video monitor (945-line) are taken from the manufacturers handbooks. ^[10, 11] A complete listing of specifications for the two monitors and control circuits may be found in the handbooks.

<u>Specification</u>	<u>525-Line</u>	<u>945-Line</u>
Signal Input	from 0.25 to 1.0 v. peak-to-peak with sync. negative.	from 0.50 to 2.0 v. peak-to-peak with sync. negative.
Power Inputs	115 vac., 60 cycles, 300 watts.	117 vac., 50/60 cycles, 180 watts.
Video Bandwidth	video response beyond 10 mc.	flat to 20 mc. \pm 1 db.

REFERENCES

- (1) B. Botha, and D. Shurtleff, "Studies of Display Symbol Legibility: The Effects of Line Construction, Exposure Time and Stroke-width," The MITRE Corporation, Bedford, Mass., ESD-TDR-63-249, Dec. 1962.
- (2) B. Botha, and D. Shurtleff, "Studies of Display Symbol Legibility II: The Effects of the Ratio of Widths of Inactive to Active Elements Within a TV Scan Line and the Scan Pattern Used in Symbol Construction," The MITRE Corporation, Bedford, Mass., ESD-TDR-63-440, July 1963.
- (3) D. Shurtleff, and D. Owen, "Studies of Display Symbol Legibility VI: Leroy and Courtney Symbols." The MITRE Corporation, Bedford, Mass., ESD-TR-65-136, February 1965.
- (4) D. Shurtleff, B. Botha, and M. Young, "Studies of Display Symbol Legibility III: Line Scan Orientation Effects," The MITRE Corporation, Bedford, Mass., ESD-TR-65-138, December 1963.
- (5) G. Kosmider, "Studies of Display Symbol Legibility V: The Effects of Television Transmission on the Legibility of Common Five-Letter Words," The MITRE Corporation, Bedford, Mass., ESD-TR-65-135, May 1966.
- (6) J. Mitchell, and G. Kinney, "A Discussion of the Use of Television for Data Display," The MITRE Corporation, Bedford, Mass., Working Paper W-06951, March 1964.
- (7) L. L. Pourcaui, M. Altman, and C. A. Washburn, "A High Resolution Television System," J. of SMPTE, 1960, 69, 105-108.
- (8) Allen B. DuMont Laboratories, Inc., Industrial Television Service Manual, Clifton, New Jersey.
- (9) General Precision, Preliminary Instructions for GPL High Resolution Television System Model 601. GPL Division, Pleasantville, New York.
- (10) Miratel Electronics, Inc., Miratel "L" Series Television Monitor Technical Data and Specifications, St. Paul 12, Minn.
- (11) Conrac Division of Giannini Control Corp., Installation and Operating Instructions for Conrac Television Monitor Model CQC (945-lines per frame), Glendora, Calif.

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) The MITRE Corporation Bedford, Massachusetts		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE Studies in Display Symbol Legibility, Part VII Comparison of Displays at 945- and 525-Line Resolutions			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5. AUTHOR(S) (Last name, first name, initial) Shurtleff, Donald Owen, D.			
6. REPORT DATE May 1966		7a. TOTAL NO. OF PAGES 19	7b. NO. OF REFS 11
8a. CONTRACT OR GRANT NO. AF 19(628)-5165		9a. ORIGINATOR'S REPORT NUMBER(S) ESD-TR-65-137	
b. PROJECT NO. 7030			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		TM-4213	
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.			
11. SUPPLEMENTARY NOTES N/A		12. SPONSORING MILITARY ACTIVITY Deputy for Engineering and Technology Decision Sciences Laboratory Electronic Systems Division L. G. Hanscom Field, Bedford, Mass.	
13. ABSTRACT <p>The legibility of Leroy alphanumeric characters was determined for 6, 8, 10, and 12 active scan lines per symbol height on a good quality 945-line television system. These results were compared with those of a similar study in which an inexpensive commercial 525-line television system was used. One group of subjects identified symbols displayed by the 945-line system while a second group identified symbols displayed by the 525-line system. The symbols were presented singly, and the speed and accuracy with which the subjects were able to identify them were recorded. The results showed that, even with good quality television, identification performance deteriorated for resolutions lower than 10 lines per symbol height. Performance for the two television systems was similar for 8, 10, and 12 lines per symbol height; but at 6 lines per symbol height, performance was better for the 945-line television than it was for the 525-line television system. As with previous experiments in this series, 10 lines per symbol height was the lowest resolution recommended for television displays.</p>			

DD FORM 1473
1 JAN 64

Unclassified

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
SYSTEMS Displays Display Design Psychology Human Characteristics Legibility Readability						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.